

Aspirator 3

Quality – Made in Germany



Precise aspiration pump for follicular puncture

Advantages of Aspirator 3:

- Approved medical device
- Easy handling by electrical pedal
- Long durability
- High reliability
- Very silent
- Constant control of negative pressure
- Safe by overflow protection

Basic equipment:

- Aspirator 3
- Foot pedal
- Mains adapter
- 2 x overflow bottle, 2 x blocking filter and tubing

REF 14193 (without hotplate)

REF 13907 (with integrated hotplate)

Picture shows device with integrated hotplate (optional), heating block and puncture set from Labotect


Optional accessory:

- Integrated hotplate

REF 13907 (Aspirator 3 with hotplate)

- Movable support stand

REF 14287

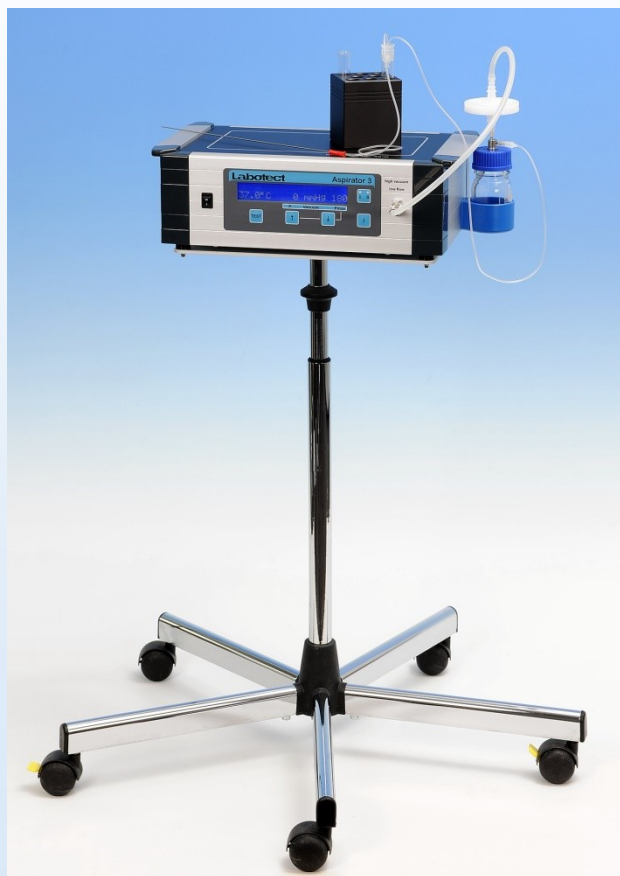

Technical data:

- According to Directive 93/42/EEC: Class IIa
- EN 10079 conform: high vacuum, low flow
- Negative pressure:
0 – 500 mmHg $\pm$ 0 – 666 mbar
- Volume of overflow vessel: 100 ml
- Dimensions:
 - ~ 408 x 130 x 250 (w x h x d in mm)
- Weight: ~ 7.6 kg
- Connection for aspiration tubing: $\varnothing$ 2 to 4 mm
- Power supply: 230 V AC, 50/60 Hz or
115 V AC, 50/60 Hz, 85 VA
- Safety class: I
- Device type: BF
- Hotplate (optional):
 - Temperature range: 30 °C – 45 °C
 - Accuracy: $\pm$ 0.2 °C
 - Temperature distribution: $\pm$ 0.5 °C
 - Heating up time: < 10 min.
- Connection for potential compensation



CE 0123

Rev. 6_01/2017